

The sling choker, wrapped around a beam, provides an anchorage attachment point capable of supporting a load of 5,000 lbs. (22.2 kN).

⚠ WARNING


Always select an anchorage point that is rigid and capable of supporting 5,000 lbs. (22.2 kN) per person attached.

APPLICABLE STANDARDS

- Manufactured in accordance with ANSI, OSHA and CSA requirements.
- Meets and/or exceeds 5,000 lbs. (22.2 kN) strength requirements for anchorage point.
- Ask customer service for specific standards as federal, state, local or provincial regulations may differ.

AVAILABLE MODEL

- **V4115** Sling choker

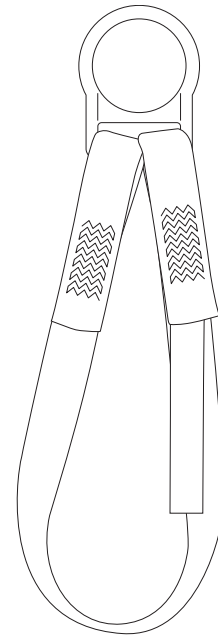

PARTS	SPECIFICATIONS
WEBBING	High tenacity polyester webbing Width: 1½ in. (30 mm) Thickness: ⅜ in. (3 mm) Tensile strength: 9,000 lbs. (40 kN) Webbing is heat-cut to prevent fraying.
STITCHING	Sling is lock-stitched. Thread: #138 polyester
2½ IN. (63 MM) D-RING	Plating: zinc dichromate Proof-loaded 100% at 3,600 lbs. (16 kN) Tensile strength: 5,000 lbs. (22.2 kN)
CAPACITY	310 lbs. (140 kg), one person