

The versafit harness is Tractel®'s most versatile harness. With its adjustable leg, shoulder, chest and sub-pelvic straps it can be adjusted to a perfect fit for maximum comfort.

For further information, refer to the "Use and Maintenance Instructions" for harnesses and lanyards.

#### FEATURES

- Adjustable sub-pelvic strap
- Seven-point adjustment
- Adjustable back D-ring
- Adjustable chest strap
- Lanyard retaining clips on both shoulder straps
- Fall indicators / inspection tag / serial number
- Accommodates tool belt up to 4 in. (102 mm) wide
- Ideal for use with Tracvest
- Two colors: blue shoulder straps and black leg straps

#### APPLICATIONS

- Fall arrest
- Optional:
  - work positioning
  - retrieval
  - ladder climbing
  - suspension


#### APPLICABLE STANDARDS

- CSA Z259.10-12
- ANSI Z359.1-2007
- ANSI Z359.11-2014
- ANSI A10.32-2012
- OSHA 1926
- OSHA 1910
- New York BSA approval 9607 (for quick connect legs)
- New York BSA approval 9608 (for tongue and buckle legs)

#### SIZES

- One size fits most: AC732
- Small: AC732S
- Medium: AC732M
- Large: AC732L
- X-large: AC732XL
- XX-large: AC732XXL

\*Available sizes may vary by model.

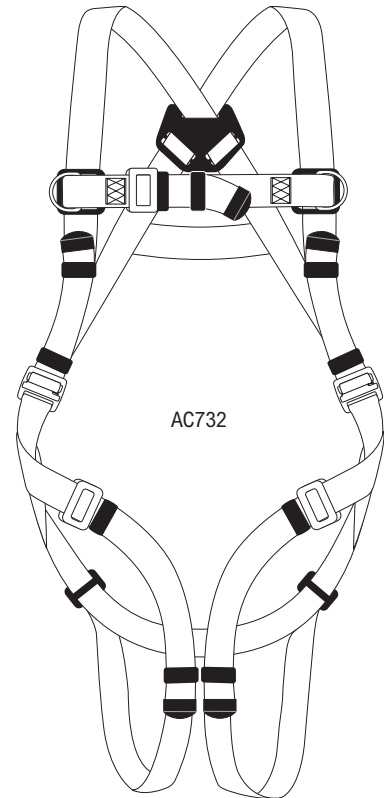


AVAILABLE MODELS

**AC732**




- Quick-connect legs
- Back dorsal D-ring
- Adjustable chest strap
- Available sizes:  
S, one size, XL and XXL

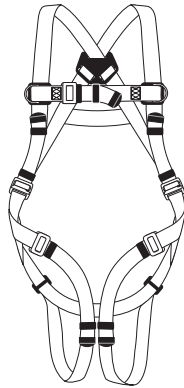

**AD732**




- Tongue and buckle legs
- Back dorsal D-ring
- Adjustable chest strap
- Available sizes:  
S, one size, XL and XXL

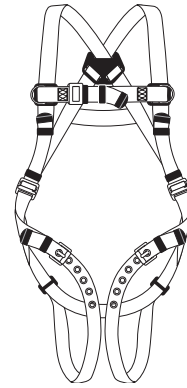

**AC742**




- Quick-connect legs
- Back dorsal D-ring
- Side positioning D-rings
- Adjustable chest strap
- Available sizes:  
S, one size, XL and XXL

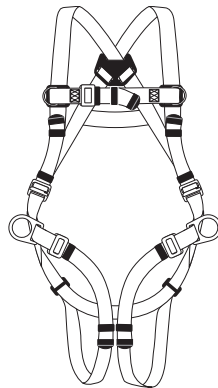

**AD742**




- Tongue and buckle legs
- Back dorsal D-ring
- Side positioning D-rings
- Adjustable chest strap
- Available sizes:  
S, one size, XL and XXL

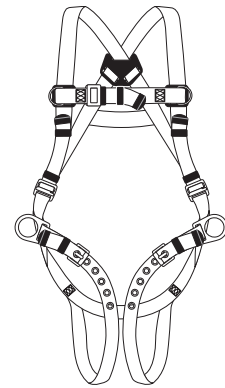

**AD714**




- Tongue and buckle legs
- Back dorsal D-ring
- Retrieval D-rings
- Sternal D-ring
- Fixed chest strap
- Available sizes:  
S, one size, XL and XXL

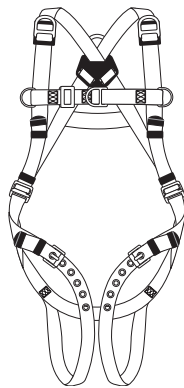

**EBD95**



- Tongue and buckle legs
- Back dorsal D-ring
- Removable belt
- Fall arrest applications
- Side positioning D-rings
- Adjustable chest strap
- Available sizes:  
M, L and XL

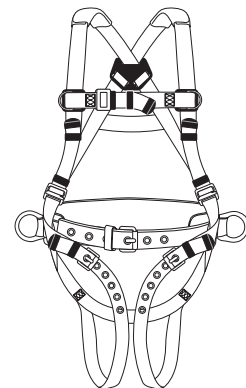

PARTS	SPECIFICATIONS
<b>WEBBING</b>	High tenacity polyester Width: 1¾ in. (45 mm) Thickness: ¼ in. (1.4 mm) Maximum breaking strength: 5,700 lbs. (25.4 kN) Webbing is heat-cut to prevent fraying.
<b>TONGUE AND BUCKLE WEBBING (LEGS)</b>	High tenacity polyester Width: 1¾ in. (45 mm) Thickness: ¼ in. (3 mm) Maximum breaking strength: 9,000 lbs. (40 kN) Webbing is heat-cut to prevent fraying.
<b>STITCHING</b>	Harness is lock-stitched. Thread: #138 polyester
<b>BACK AND SIDE D-RINGS</b>	Plating: zinc dichromate Proof-loaded 100% at 3,600 lbs. (16 kN) Maximum breaking strength: 5,000 lbs. (22.2 kN)
<b>SLIDING BAR ADJUSTER</b>	Plating: zinc dichromate Maximum breaking strength: 4,000 lbs. (17.8 kN)
<b>QUICK CONNECT BUCKLE</b>	Plating: zinc dichromate Maximum breaking strength: 4,000 lbs. (17.8 kN)
<b>TONGUE AND BUCKLE</b>	Plating: zinc dichromate Maximum breaking strength: 4,000 lbs. (17.8 kN)
<b>GROMMETS</b>	#2 spur brass
<b>PLASTIC AND ELASTIC RETAINERS</b>	Each webbing strap with a free end has keeper loops.
<b>CAPACITY</b>	386 lbs. (175 kg), one person