

Specially designed to be as lightweight as possible, the phoenix harness is recommended for your compliance, restraint and fall arrest applications.

For further information, refer to the "Use and Maintenance Instructions" for harnesses and lanyards.

FEATURES

- Adjustable dorsal D-ring
- Adjustable chest strap
- Sewn sub-pelvic strap
- Back strap
- Three-point adjustment
- Inspection tag / serial number
- Blue color

APPLICATIONS

- Restraint
- Fall arrest
- Optional work positioning

APPLICABLE STANDARDS

- CSA Z259.10-12
- ANSI Z359.1-2007
- ANSI Z359.11-2014
- ANSI A10.32-2012
- OSHA 1926
- OSHA 1910

SIZES



- One size fits most: AC432

AVAILABLE MODELS

AC432



- Quick-connect legs

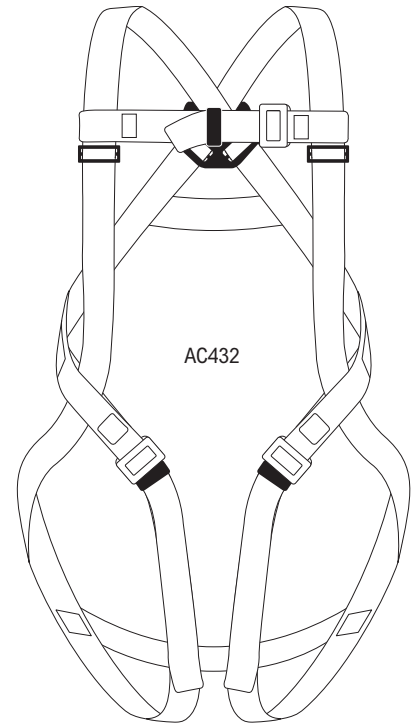

PARTS	SPECIFICATIONS
WEBBING	High tenacity polyester Width: 1¾ in. (45 mm) Thickness: ¼ in. (1.4 mm) Tensile strength: 5,700 lbs. (25.4 kN) Webbing is heat-cut to prevent fraying.
STITCHING	Harness is lock-stitched. Thread: #138 polyester
BACK AND SIDE D-RINGS	Plating: zinc dichromate Proof-loaded 100% at 3,600 lbs. (16 kN) Tensile strength: 5,000 lbs. (22.2 kN)
QUICK CONNECT BUCKLE	Plating: zinc dichromate Tensile strength: 4,000 lbs. (17.8 kN)
PLASTIC AND ELASTIC RETAINERS	Each webbing strap with a free end has keeper loops.
CAPACITY	386 lbs. (175 kg), one person