

When properly installed, the reusable flat roofing anchor provides a safe anchorage point for personal fall arrest system with a minimum breaking strength of 5,000 lbs. (22.2 kN).

The reusable flat roofing anchor is design for ease of installation on any roof peak angle as well as flat roofs. The hinged D-ring ensures correct alignment of the lifeline connector minimizing the risk of cross loading.

It is supplied with 6 screws #12 x 2⁷/₈ in. (73 mm) with #3 Phillips pan head.

⚠ WARNING

Always select an anchorage point that is capable of supporting 5,000 lbs. (22.2 kN).



APPLICABLE STANDARDS

- Manufactured in accordance with ANSI, OSHA and CSA requirements.
- Meets and/or exceeds 5,000 lbs. (22.2 kN) strength requirements for anchorage point.

AVAILABLE MODEL

- **428104S** Reusable flat roofing anchor with screws

SPECIFICATIONS	
CONSTRUCTION	Stamped steel
MINIMUM BREAKING STRENGTH	5,000 lbs. (22.2 kN)
D-RING	Proof-loaded 100% at 3,600 lbs. (16 kN) Tensile strength: 5,000 lbs. (22.2 kN)
CAPACITY	385 lbs. (175 kg), one person

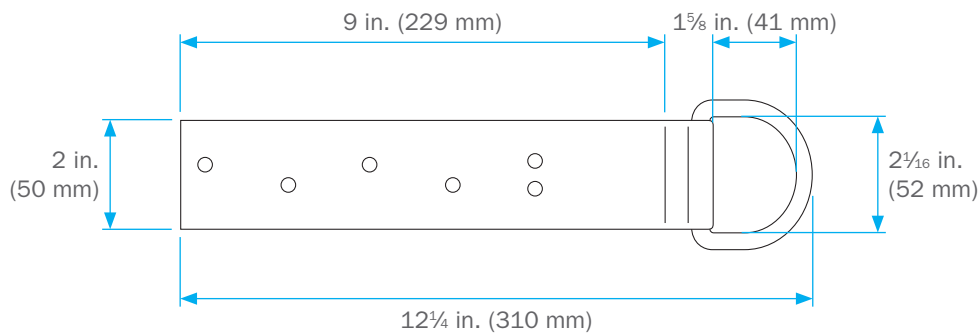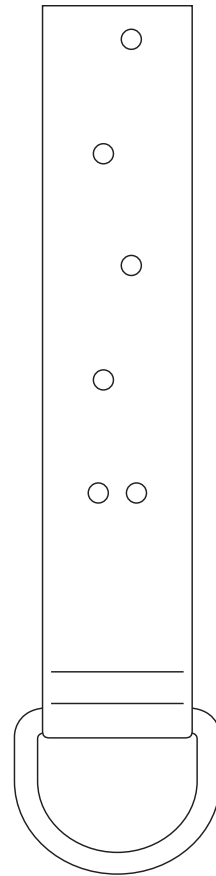

Specifications are subject to change without notice. Images are for illustrative purposes only.